









# **Perforation without limits**



**RMIG**  
**Stock list 107**



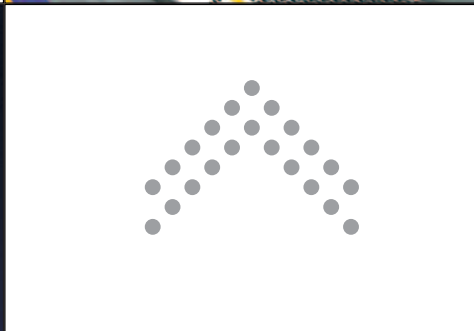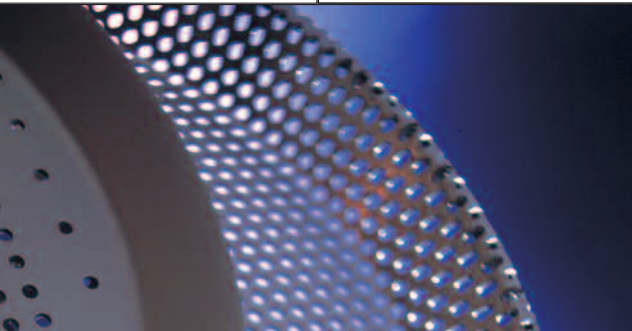





#### Perforation without limits

With manufacturing units and sales offices throughout Europe and several thousand sheets in stock, RMIG can offer a unique service in the production and delivery of perforated sheets.

The aim of this stock list is to provide you with information about the roughly 1000 different specifications we have in stock.


Please note that we reserve the right to change the information within this brochure without prior notice. Availability ex-stock is subject to the items remaining unsold.

We refer to our general conditions for sale and delivery, which can be found on our homepage [www.rmig.com](http://www.rmig.com).



# RM Stock list 107

● = 1 day of delivery  
▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Dimension: 1000 x 2000 mm																						
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)																						
R 1.00	T 2.00	22.7%					▲		●													
R 1.50	T 2.50	33.0%							▲													
R 1.50	T 2.60	30.2%							●													
R 1.50	T 3.00	22.7%					▲															
R 2.00	T 3.50	29.6%							●			▲										
R 3.00	T 5.00	32.7%					▲		●			●	▲									
R 4.00	T 5.00	58.0%							▲													
R 4.00	T 6.00	40.3%							▲			▲	▲									
R 5.00	T 7.00	46.3%							▲			▲										
R 5.00	T 7.50	40.3%							●			●	●									
R 5.00	T 8.00	35.4%							●			▲	▲		▲							
R 6.00	T 9.00	40.3%							▲			▲	▲									
R 8.00	T 11.00	48.0%											●									
R 8.00	T 12.00	40.3%							▲			▲	▲									
R 10.00	T 14.00	46.3%							▲			▲	▲		▲							
R 10.00	T 15.00	40.3%							▲			▲	▲		▲							
R 15.00	T 21.00	46.0%											▲		●							
R 20.00	T 28.00	46.3%											▲									
Aluminium EN 5754 (AlMg3)																						
R 2.00	T 3.50	29.6%							▲													
R 3.00	T 5.00	32.7%					▲		▲			▲										
R 5.00	T 8.00	35.4%							▲			▲	▲		▲							
R 6.00	T 9.00	40.3%											▲									
R 8.00	T 15.00	26.0%																▲	▲			
R 10.00	T 15.00	40.3%											▲									
Mild steel																						
R 0.50	T 1.09	19.1%		●																		
R 0.75	T 1.50	22.7%					●															
R 1.00	T 2.00	22.7%		●			●		●													
R 1.10	T 2.00	27.4%							▲													
R 1.25	T 2.40	24.6%					●		●													
R 1.50	T 2.50	33.0%					▲		▲			▲										
R 1.50	T 2.60	30.2%					●		●			▲										
R 1.50	T 3.00	22.7%							▲			●										
R 1.75	T 3.00	31.0%										●										
R 2.00	T 3.00	40.3%					▲		▲	▲		●										
R 2.00	T 3.50	29.6%		●			●		●			▲	●									
R 2.00	T 4.00	22.7%							▲			▲	▲									
R 2.50	T 3.50	46.3%							▲			▲	▲		▲							
R 2.50	T 4.00	35.4%							●			●	●									
R 2.75	T 4.50	34.0%											●									
R 3.00	T 4.00	51.0%							▲	▲		●			●							
R 3.00	T 4.50	40.3%							▲													
R 3.00	T 5.00	32.7%		▲			▲		●			●	●		●							
R 3.00	T 6.00	22.7%							▲			▲										
R 3.25	T 5.25	34.8%											▲									
R 3.50	T 5.00	44.4%							●						▲							
R 3.50	T 5.50	37.0%											●		●							
R 4.00	T 5.00	58.0%							▲			▲										
R 4.00	T 5.25	52.7%														▲						
R 4.00	T 5.60	46.0%							●													
R 4.00	T 6.00	40.3%		▲			▲		▲			●	●		●	●						
R 4.00	T 7.00	29.6%							▲			▲	▲		▲							
R 4.00	T 8.00	23.0%															▲					
R 4.50	T 7.00	38.0%											●									
R 5.00	T 6.50	54.0%							▲													
R 5.00	T 7.00	46.3%		▲					▲			▲										
R 5.00	T 7.50	40.3%							●			●										
R 5.00	T 8.00	35.4%					▲		▲			●	●		●	●		●				
R 5.00	T 10.00	22.7%																▲				
R 6.00	T 7.20	63.2%							▲													
R 6.00	T 8.00	51.0%							●			●										
R 6.00	T 9.00	40.3%					▲		▲			▲	●		●	●		●	▲			
R 7.00	T 10.00	44.4%							●			▲	▲		▲							
R 8.00	T 10.00	58.0%							●			●	▲									
R 8.00	T 11.00	48.0%					▲		▲			●	●		●	▲						
R 8.00	T 12.00	40.3%							▲			▲	▲		▲	●		●	●			
R 8.00	T 15.00	26.0%																		●		
R 9.00	T 12.00	51.0%											●									
R 10.00	T 12.70	56.2%							●			●	●									
R 10.00	T 14.00	46.3%							▲			▲	▲		▲							
R 10.00	T 15.00	40.3%					▲		▲			▲	▲		●	●		●	●			
R 10.00	T 16.00	35.0%																		●	●	
R 11.00	T 14.50	52.0%							●													
R 12.00	T 15.55	54.0%							●				●									
R 12.00	T 16.00	51.0%							▲			▲	▲		●				●			
R 12.00	T 17.00	45.2%										▲	▲									
R 12.00	T 18.00	40.3%							▲				▲	▲						▲		
R 14.00	T 16.50	65.0%							●													



# RM Stock list 107



● = 1 day of delivery  
▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Round holes	Triangular pitch - Mild steel continued		0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
R 15.00	T 19.00	56.5%										▲										
R 15.00	T 20.00	51.0%							●				●		●							
R 15.00	T 21.00	46.0%							▲				▲					▲				
R 15.00	T 22.00	42.2%							▲			▲	▲		▲	▲		▲				
R 15.00	T 24.70	33.0%																			●	
R 16.00	T 20.00	58.0%							●													
R 20.00	T 27.00	49.8%										▲	▲			▲		▲	▲			
R 20.00	T 28.00	46.3%											▲		●	●		●				
R 20.00	T 30.00	40.3%										▲			▲							
R 25.00	T 35.00	46.3%											▲									
R 30.00	T 40.00	51.0%											▲									
Sendzimir galvanised (DX51D)																						
R 1.50	T 2.60	30.2%							●				▲									
R 2.00	T 3.50	29.6%							●				▲	●								
R 3.00	T 5.00	32.7%		▲	▲			●	●			●	▲									
R 3.00	T 6.00	22.7%		▲					▲													
R 4.00	T 6.00	40.3%							▲													
R 4.00	T 7.00	29.6%		▲				▲	▲													
R 5.00	T 6.50	54.0%						▲	▲													
R 5.00	T 7.00	46.3%						▲	▲			▲	▲									
R 5.00	T 7.50	40.3%			▲			▲	●			●										
R 5.00	T 8.00	35.4%						▲	▲			▲	▲									
R 6.00	T 7.20	63.2%		▲																		
R 6.00	T 8.00	51.0%							●			▲										
R 6.00	T 9.00	40.3%							▲			▲	▲									
R 7.00	T 10.00	44.4%							▲			▲										
R 8.00	T 11.00	48.0%							▲			▲	▲									
R 8.00	T 12.00	40.3%							▲			▲	▲									
R 10.00	T 14.00	46.3%							▲			▲	▲									
R 10.00	T 15.00	40.3%							▲			▲	▲									
R 15.00	T 22.00	42.2%										▲	▲									
R 20.00	T 27.00	49.8%											▲									
R 20.00	T 28.00	46.3%											▲									
Stainless steel EN 1.4301 (AISI 304)																						
R 0.50	T 1.09	19.1%	●	●																		
R 0.55	T 1.40	14.0%		●																		
R 0.60	T 1.40	17.0%		▲																		
R 0.75	T 1.50	22.7%			●																	
R 0.90	T 1.75	24.0%						▲														
R 1.00	T 2.00	22.7%	▲	●				●		●												
R 1.10	T 2.00	27.4%						▲														
R 1.25	T 2.40	24.6%							●													
R 1.50	T 2.50	33.0%		▲					▲													
R 1.50	T 2.60	30.2%	▲						●													
R 1.50	T 3.00	22.7%										●										
R 2.00	T 3.00	40.3%							●													
R 2.00	T 3.50	29.6%		●					●			●										
R 2.00	T 4.00	22.7%											●									
R 2.50	T 4.50	28.0%										●										
R 3.00	T 4.00	51.0%							▲													
R 3.00	T 5.00	32.7%						●	●			●	●		●							
R 3.00	T 6.00	22.7%							▲													
R 4.00	T 5.60	46.0%							●				●									
R 4.00	T 6.00	40.3%							●			●	▲									
R 4.00	T 7.00	29.6%										▲	▲									
R 5.00	T 7.00	46.3%							▲			▲										
R 5.00	T 7.50	40.3%							●			●										
R 5.00	T 8.00	35.4%							▲			▲	●		●			●				
R 6.00	T 8.00	51.0%							●			●	▲									
R 6.00	T 9.00	40.3%							▲			▲	▲									
R 8.00	T 10.00	58.0%							●			●	●									
R 8.00	T 11.00	48.0%							▲			▲	●									
R 8.00	T 12.00	40.3%							▲			▲	▲		▲							
R 8.00	T 15.00	26.0%													●					●		
R 10.00	T 12.70	56.2%							●			●	●									
R 10.00	T 14.00	46.3%							▲			▲	▲									
R 10.00	T 15.00	40.3%							▲			●	▲		●	●						
R 12.00	T 16.00	51.0%											●									
R 15.00	T 21.00	46.0%										▲										
R 20.00	T 27.00	49.8%											▲									
R 20.00	T 28.00	46.3%											▲									
Stainless steel EN 1.4301 1 side polished grain 240 + PVC																						
R 5.00	T 8.00	35.4%										▲										
R 10.00	T 15.00	40.3%										▲										
Stainless steel EN 1.4301 2 sides polished grain 240 + PVC																						
R 10.00	T 15.00	40.3%										▲										
R 20.00	T 28.00	46.3%										▲										



# RM Stock list 107

- = 1 day of delivery
- ▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Stainless steel 1.4404 (AISI 316L)																						
R 1.00	T 2.00	22.7%							●				▲									
R 2.00	T 3.00	40.3%										▲										
R 2.00	T 3.50	29.6%							●													
R 3.00	T 5.00	32.7%					▲		●			●	●									
R 5.00	T 7.00	46.3%							▲													
R 5.00	T 8.00	35.4%					▲		▲			▲	▲		▲							
R 6.00	T 9.00	40.3%											●									
R 8.00	T 10.00	58.0%										●										
R 8.00	T 11.00	48.0%							▲													
R 8.00	T 12.00	40.3%							▲			▲	▲		▲							
R 10.00	T 14.00	46.3%											▲									
R 10.00	T 15.00	40.3%													●							
Dimension: 1000 x coil mm																						
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Stainless steel EN 1.4404 (AISI 316L)							▲															
R 3.00	T 5.00	32.7%					▲															
R 5.00	T 8.00	35.4%					▲															
Dimension: 1250 x 2500 mm																						
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)												▲	▲									
R 3.00	T 5.00	32.7%										▲	▲									
R 5.00	T 8.00	35.4%							▲			▲	▲		▲							
R 8.00	T 12.00	40.3%											▲		▲							
R 10.00	T 15.00	40.3%										▲	▲									
R 20.00	T 28.00	46.3%											▲									
Aluminium EN 5754 (AlMg3)																						
R 5.00	T 8.00	35.4%							▲													
Mild steel																						
R 1.00	T 2.00	22.7%							●													
R 1.50	T 3.00	22.7%							▲													
R 2.00	T 3.50	29.6%							▲			▲	●									
R 3.00	T 4.00	51.0%							▲													
R 3.00	T 5.00	32.7%							●			▲	▲		●							
R 4.00	T 6.00	40.3%							●				▲		●							
R 5.00	T 7.50	40.3%							▲			●										
R 5.00	T 8.00	35.4%							▲			●	▲		▲							
R 6.00	T 8.00	51.0%										●										
R 6.00	T 9.00	40.3%								▲		▲	▲		●							
R 8.00	T 11.00	48.0%							▲			▲	●									
R 8.00	T 12.00	40.3%							▲			▲	▲		●							
R 10.00	T 14.00	46.3%										▲	▲									
R 10.00	T 15.00	40.3%							▲			▲	▲		●							
R 10.00	T 16.00	35.0%																		●		
R 12.00	T 16.00	51.0%										▲							●			
R 15.00	T 21.00	46.0%											▲									
R 15.00	T 22.00	42.2%												▲								
R 20.00	T 27.00	49.8%											▲									
R 20.00	T 28.00	46.3%											▲									
R 30.00	T 40.00	51.0%											▲									
Sendzimir galvanised (DX51D)																						
R 2.00	T 3.50	29.6%					▲		▲													
R 3.00	T 5.00	32.7%					●		●			▲										
R 4.00	T 6.00	40.3%							▲													
R 5.00	T 7.00	46.3%							▲			▲	▲									
R 5.00	T 7.50	40.3%							▲													
R 5.00	T 8.00	35.4%		▲			▲		▲			●	▲									
R 6.00	T 8.00	51.0%							●			▲	●									
R 6.00	T 9.00	40.3%										▲										
R 8.00	T 10.00	58.0%					▲		▲			▲										
R 8.00	T 12.00	40.3%							▲			▲										
R 10.00	T 14.00	46.3%							▲			▲	▲									
R 10.00	T 15.00	40.3%							▲			▲	▲									
R 20.00	T 27.00	49.8%											▲									
Stainless steel EN 1.4301 (AISI 304)																						
R 1.50	T 2.60	30.2%							▲													
R 2.00	T 3.50	29.6%							▲			▲										
R 3.00	T 5.00	32.7%					▲		●	▲		●	●									
R 4.00	T 6.00	40.3%							▲													
R 5.00	T 8.00	35.4%							▲			▲	▲									
R 6.00	T 9.00	40.3%										▲										
R 8.00	T 12.00	40.3%							▲			▲	▲									
R 10.00	T 15.00	40.3%							▲			▲	▲									
R 20.00	T 28.00	46.3%											▲									
Stainless steel EN 1.4301 1 side polished grain 240 + PVC																						
R 5.00	T 8.00	35.4%										▲										
R 10.00	T 15.00	40.3%										▲										



# RM Stock list 107

● = 1 day of delivery  
▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Stainless steel EN 1.4404 (AISI 316L)									●	▲			▲			▲						
R 3.00	T 5.00	32.7%							●				▲									
R 5.00	T 7.50	40.3%							●													
R 6.00	T 9.00	40.3%											▲									
Dimension: 1500 x 3000 mm																						
Round holes   Triangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)																						
R 3.00	T 5.00	32.7%											▲									
R 5.00	T 8.00	35.4%							▲				▲									
R 10.00	T 15.00	40.3%											▲									
R 20.00	T 28.00	46.3%											▲									
Mild steel																						
R 2.50	T 4.00	35.4%												●								
R 2.75	T 4.50	34.0%												●								
R 3.00	T 4.00	51.0%													●							
R 3.00	T 4.50	40.3%													●							
R 3.00	T 5.00	32.7%							▲				▲	▲								
R 4.00	T 6.00	40.3%													●							
R 5.00	T 7.00	46.3%											▲									
R 5.00	T 7.50	40.3%													●							
R 5.00	T 8.00	35.4%							▲				▲	▲								
R 6.00	T 9.00	40.3%													●							
R 8.00	T 12.00	40.3%											▲	▲	●			●				
R 10.00	T 14.00	46.3%							▲				▲	▲								
R 10.00	T 15.00	40.3%												▲	●		●					
R 15.00	T 21.00	46.0%												▲								
R 20.00	T 27.00	49.8%											▲	▲								
Sendzimir galvanised (DX51D)																						
R 3.00	T 5.00	32.7%							●				▲									
R 4.00	T 6.00	40.3%							▲				▲									
R 5.00	T 7.00	46.3%							▲													
R 5.00	T 8.00	35.4%							▲				▲	▲								
R 8.00	T 12.00	40.3%											▲	▲								
R 10.00	T 14.00	46.3%											▲	▲								
R 10.00	T 15.00	40.3%											▲	▲								
Stainless steel EN 1.4301 (AISI 304)																						
R 3.00	T 5.00	32.7%											▲									
R 5.00	T 8.00	35.4%							▲				▲	▲								
R 6.00	T 9.00	40.3%											●									
R 10.00	T 15.00	40.3%											▲	▲								
Dimension: 1000 x 2000 mm																						
Round holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)																						
R 4.50	U 15.00	7.1%											▲	▲								
R 10.00	U 20.78	18.2%							▲													
R 10.00	U 25.98	11.6%												▲								
R 15.00	U 36.38	15.4%												▲								
Aluminium EN 1050A (2S) + PVC																						
R 20.00	U 48.50	15.4%												▲								
Mild steel																						
R 3.40	U 5.00	36.0%												▲								
R 4.50	U 15.00	7.1%							▲				▲									
R 4.50	U 25.00	3.0%											▲	▲								
R 5.00	U 10.00	20.0%							▲													
R 5.00	U 12.50	12.6%							▲				●									
R 5.00	U 25.00	3.2%							▲				▲									
R 7.00	U 25.00	6.2%											▲									
R 10.00	U 20.78	18.2%												▲								
R 20.00	U 48.50	15.4%												▲								
Sendzimir galvanised (DX51D)																						
R 3.00	U 8.00	11.0%			▲																	
R 4.50	U 15.00	7.1%											▲									
R 5.00	U 14.00	10.0%							▲													
R 10.00	U 20.78	18.2%												▲								
R 10.00	U 26.00	12.0%							●													
Stainless steel EN 1.4301 (AISI 304)																						
R 4.50	U 15.00	7.1%											▲									
R 20.00	U 48.50	15.4%											▲									
Stainless steel EN 1.4301 1 side polished grain 240 + PVC																						
R 4.50	U 15.00	7.1%											▲									
R 10.00	U 15.00	34.9%											▲									
R 10.00	U 25.98	11.6%											▲									
Stainless steel EN 1.4301 2 sides polished grain 240 + PVC																						
R 4.50	U 15.00	7.1%											▲									
R 10.00	U 15.00	34.9%											▲									
R 15.00	U 36.38	15.4%											▲									





# RM Stock list 107

● = 1 day of delivery  
▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																		
Dimension: 1250 x 2500 mm																					
Round holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Aluminium EN 1050A (2S)																					
R 4.50	U 15.00	7.1%										▲									
R 10.00	U 20.78	18.2%											▲								
R 10.00	U 25.98	11.6%											▲								
Aluminium EN 1050A (2S) + PVC																					
R 20.00	U 48.50	15.4%											▲								
Mild steel																					
R 4.50	U 15.00	7.1%							▲			▲									
R 10.00	U 20.78	18.2%											▲								
Sendzimir galvanised (DX51D)																					
R 4.50	U 15.00	7.1%										▲									
Dimension: 1500 x 3000 mm																					
Round holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
R 4.50	U 15.00	7.1%										▲									
Sendzimir galvanised (DX51D)																					
R 4.50	U 15.00	7.1%										▲									
Dimension: 1000 x 2000 mm																					
Square holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Aluminium EN 1050A (2S)																					
C 5.00	U 7.00	51.0%										▲									
C 5.00	U 7.50	44.4%							●			●									
C 5.00	U 8.00	39.1%							▲			▲	▲								
C 6.00	U 9.00	44.4%											▲								
C 8.00	U 12.00	44.4%							●			▲	▲								
C 9.50	U 13.33	50.8%							●												
C 10.00	U 12.00	69.4%											●								
C 10.00	U 14.00	51.0%							●					▲							
C 10.00	U 15.00	44.4%							▲			▲	▲								
Aluminium EN 1050A (2S) + PVC																					
C 8.00	U 24.00	11.1%											▲								
C 10.00	U 30.00	11.1%											▲								
C 20.00	U 50.00	16.0%											▲								
Aluminium EN 5754 (AlMg3)																					
C 10.00	U 15.00	44.4%											▲								
Hot dip galvanised																					
C 9.50	U 13.33	50.8%										●	●								
Mild steel																					
C 4.00	U 6.38	40.0%							●												
C 4.00	U 7.00	32.7%							▲			▲									
C 5.00	U 7.00	51.0%							▲			▲	▲								
C 5.00	U 7.50	44.4%							●			●	▲								
C 5.00	U 8.00	39.1%							▲			▲	▲								
C 5.00	U 16.00	9.8%							▲												
C 5.50	U 8.00	47.3%							▲												
C 6.00	U 9.00	44.4%							▲			▲	▲								
C 6.00	U 10.00	36.0%							●												
C 7.00	U 10.00	49.0%							▲			▲									
C 8.00	U 10.00	64.0%							●			▲	▲								
C 8.00	U 12.00	44.4%							▲			▲	▲								
C 9.00	U 34.00	7.0%										●	▲								
C 9.20	U 34.00	7.0%										▲	▲								
C 9.20	U 38.00	6.0%										●									
C 9.50	U 13.33	50.8%							●			●	●		●						
C 10.00	U 12.00	69.4%		▲					●			●	●								
C 10.00	U 13.00	59.2%							▲			▲	▲								
C 10.00	U 14.00	51.0%							▲			▲	▲		▲						
C 10.00	U 15.00	44.4%							▲			▲	▲		▲						
C 10.00	U 30.00	11.1%							▲				▲								
C 15.00	U 20.00	56.3%							▲			●	●		▲						
C 20.00	U 25.00	64.0%											▲								
C 20.00	U 40.00	25.0%										▲	▲								
C 25.00	U 30.00	69.4%											▲								
C 30.00	U 60.00	25.0%										▲	▲								
C 40.00	U 80.00	25.0%										▲	▲								
Sendzimir galvanised (DX51D)																					
C 5.00	U 7.00	51.0%										▲									
C 5.00	U 7.50	44.4%							▲												
C 5.00	U 8.00	39.1%							▲			▲	▲								
C 5.50	U 8.00	47.3%							▲												
C 8.00	U 10.00	64.0%							▲			●	▲								
C 8.00	U 12.00	44.4%							▲			▲	▲								
C 9.50	U 13.33	50.8%							●			●	●								
C 10.00	U 12.00	69.4%							●			▲	▲								
C 10.00	U 14.00	51.0%							▲			▲	▲								
C 10.00	U 15.00	44.4%							▲			▲	▲								





# RM Stock list 107

- = 1 day of delivery
- ▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Square holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Stainless steel EN 1.4301 (AISI 304)																						
C 5.00	U 7.50	44.4%																				
C 5.00	U 8.00	39.1%																				
C 8.00	U 10.00	64.0%																				
C 8.00	U 12.00	44.4%																				
C 8.00	U 24.00	11.1%																				
C 9.50	U 13.33	50.8%																				
C 10.00	U 12.00	69.4%																				
C 10.00	U 14.00	51.0%																				
C 10.00	U 15.00	44.4%																				
C 15.00	U 40.00	14.1%																				
C 20.00	U 50.00	16.0%																				
Stainless steel EN 1.4301 1 side polished grain 240 + PVC																						
C 5.00	U 16.00	9.8%																				
C 10.00	U 30.00	11.1%																				
Stainless steel EN 1.4301 2 sides polished grain 240 + PVC																						
C 5.00	U 16.00	9.8%																				
C 10.00	U 30.00	11.1%																				
C 15.00	U 40.00	14.1%																				
C 20.00	U 50.00	16.0%																				
Stainless steel EN 1.4404 (AISI 316L)																						
C 9.50	U 13.33	50.8%																				
Dimension: 1250 x 2500 mm																						
Square holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)																						
C 7.00	U 10.00	49.0%																				
C 8.00	U 12.00	44.4%																				
C 10.00	U 15.00	44.4%																				
C 25.00	U 30.00	69.4%																				
Aluminium EN 1050A (2S) + PVC																						
C 15.00	U 60.00	6.3%																				
C 20.00	U 50.00	16.0%																				
C 25.00	U 70.00	12.8%																				
Aluminium EN 5754 (AlMg3)																						
C 5.00	U 8.00	39.1%																				
Mild steel																						
C 5.00	U 8.00	39.1%																				
C 5.00	U 16.00	9.8%																				
C 8.00	U 10.00	64.0%																				
C 8.00	U 12.00	44.4%																				
C 9.00	U 34.00	7.0%																				
C 9.50	U 13.33	50.8%																				
C 10.00	U 12.00	69.4%																				
C 10.00	U 14.00	51.0%																				
C 10.00	U 15.00	44.4%																				
C 15.00	U 20.00	56.3%																				
C 20.00	U 25.00	64.0%																				
C 20.00	U 50.00	16.0%																				
C 25.00	U 30.00	69.4%																				
C 25.00	U 35.00	51.0%																				
C 25.00	U 70.00	12.8%																				
Sendzimir galvanised (DX51D)																						
C 5.00	U 7.00	51.0%																				
C 5.00	U 8.00	39.1%																				
C 9.50	U 13.33	50.8%																				
C 10.00	U 12.00	69.4%																				
C 10.00	U 14.00	51.0%																				
C 10.00	U 15.00	44.4%																				
Stainless steel EN 1.4301 (AISI 304)																						
C 5.00	U 8.00	39.1%																				
C 8.00	U 12.00	44.4%																				
C 10.00	U 12.00	69.4%																				
C 10.00	U 15.00	44.4%																				
Stainless steel EN 1.4301 1 side polished grain 240 + PVC																						
C 10.00	U 30.00	11.1%																				
Stainless steel EN 1.4301 2 sides polished grain 240 + PVC																						
C 10.00	U 30.00	11.1%																				
Dimension: 1500 x 3000 mm																						
Square holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 1050A (2S)																						
C 10.00	U 15.00	44.4%																				
Aluminium EN 1050A (2S) + PVC																						
C 10.00	U 30.00	11.1%																				
Mild steel																						
C 5.00	U 8.00	39.1%																				
C 8.00	U 12.00	44.4%																				
C 9.50	U 13.33	50.8%																				
C 10.00	U 15.00	44.4%																				
C 15.00	U 20.00	56.3%																				



# RM Stock list 107

- = 1 day of delivery
- ▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																			
Square holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Sendzimir galvanised (DX51D)																						
C 10.00	U 15.00	44.4%										▲	▲									
Dimension: 1000 x 2000 mm																						
Slot holes   Rectangular pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Mild steel																						
LR 1.50 x 20.00	U 3.00 x 24.00	41.0%							●													
LR 2.00 x 20.00	U 4.00 x 24.00	41.0%							●													
LR 2.50 x 20.00	U 5.00 x 24.00	41.0%							●													
LR 4.00 x 13.00	U 8.00 x 18.00	34.0%										▲										
LR 4.00 x 20.00	U 8.00 x 24.00	40.0%							●													
LR 5.00 x 25.00	U 8.00 x 32.00	47.0%							●													
Stainless steel EN 1.4301 (AISI 304)																						
LR 2.00 x 20.00	U 4.00 x 24.00	41.0%							●													
LR 3.00 x 20.00	U 6.00 x 24.00	40.0%										●										
LR 5.00 x 25.00	U 8.00 x 32.00	47.0%										●										
Stainless steel EN 1.4404 (AISI 316L)																						
LR 4.00 x 20.00	U 8.00 x 24.00	40.0%							●													
Dimension: 1000 x 2000 mm																						
Slot holes   Staggered pitch			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Aluminium EN 5754 (AlMg3)																						
LR 3.00 x 20.00	Z 15.00 x 25.00	31.0%										▲										
LR 4.00 x 20.00	Z 16.00 x 25.00	38.3%										▲										
LR 5.00 x 20.00	Z 20.00 x 25.00	40.0%										▲										
LR 5.00 x 25.00	Z 24.00 x 32.00	31.0%											▲			▲						
LR 8.00 x 25.00	Z 15.00 x 32.00	42.0%												▲		▲						
Mild steel																						
LR 1.00 x 20.00	Z 6.32 x 24.00	26.1%							●													
LR 1.50 x 20.00	Z 7.50 x 24.00	32.8%							●													
LR 2.00 x 20.00	Z 8.88 x 24.00	36.7%							●													
LR 2.50 x 20.00	Z 10.80 x 24.00	38.0%							●													
LR 3.00 x 20.00	Z 12.00 x 24.00	40.0%							●													
LR 3.50 x 20.00	Z 14.00 x 24.00	40.0%							●													
LR 4.00 x 20.00	Z 16.00 x 24.00	40.0%							●				▲									
Stainless steel EN 1.4301 (AISI 304)																						
LR 1.00 x 10.00	Z 7.00 x 14.00	20.0%							●													
LR 2.00 x 20.00	Z 8.88 x 24.00	36.7%										▲										
Stainless steel EN 1.4404 (AISI 316L)																						
LR 2.00 x 20.00	Z 8.88 x 24.00	36.7%										●										
Dimension: 1000 x 2000 mm																						
Club holes			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Mild steel																						
CPR 6.00	M 6.36	48.9%							▲													
CPR 9.75	M 10.61	46.0%							●													
CPR 10.00	M 11.30	41.0%							▲													
CPR 10.00	M 11.30	49.0%							▲													
CPR 12.21	M 13.58	47.0%							●			●	●									
CPR 6.00	U 8.75	33.6%							▲													
CPRR 3.50 x 6.00	M 6.36	41.0%							▲													
CPRR 3.50 x 6.00	M 14.50	26.4%							▲													
CPRR 5.00 x 9.75	M 17.70	45.8%							▲													
CPRR 5.00 x 11.00	M 11.30	32.0%							▲			▲										
CPRR 6.00 x 9.75	M 15.00	43.0%							●													
CPRR 6.00 x 11.00	M 10.60	45.7%							▲													
CPS 15.00	M 15.60	45.3%							▲													
CPS 15.30	M 15.60	46.0%							●			●										
Sendzimir galvanised (DX51D)																						
CPR 12.21	M 13.58	47.0%							●													
CPRR 5.00 x 11.00	M 11.30	32.0%							▲													
Dimension: 1250 x 2500 mm																						
Club holes			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Mild steel																						
CPR 12.21	M 13.58	47.0%							●			●										
Dimension: 669 x 2500 mm																						
Perfocon			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0	
Stainless steel EN 1.4301 (AISI 304)																						
RJ 0.20	Z 2.50 x 1.60	3.0%			●																	



# RM Stock list 107

- = 1 day of delivery
- ▲ = 10 days of delivery








Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																		
Dimension: 1000 x 2000 mm																					
Other perforations			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
CD 7.50	M 11.50	43.0%							●												
H 11.00	T 14.00	64.3%										▲									
DEC 10.00	M 18.00	30.0%							▲												
DEC 10.50	M 18.50	29.0%							●												
DEC 2.40 x 8.50	U 15.00	30.5%							▲												
DEC 8.00	U 11.00	49.0%							●												
DEC 34.50 x 48.00	Z 55.00 x 55.00	38.0%							●												
SPEC 3.00	SPEC 7.00	0.0%							▲					▲							
RAS 5.00 x 8.10	M 17.68	20.0%												●							
RAS 8.50	M 35.30	6.4%														▲					
RAS 11.00 x 10.00	M 36.36	14.0%												●							
EM 8.00 x 12.00	Z 13.25 x 20.00	0.0%												●							
Sendzimir galvanised (DX51D)																					
DEC 3.80 x 6.60	U 10.00 x 20.00	22.0%												●							
POLR 2.00 x 5.00	Z 19.00 x 50.00	%												▲							
RAS 5.00 x 8.10	M 17.68	20.0%												●							
Stainless steel EN 1.4301 (AISI 304)																					
RAS 5.00 x 8.10	M 17.68	20.0%											●								
Dimension: 1500 x 3000 mm																					
Other perforations			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
RAS 8.50	M 35.30	6.4%													▲						
Dimension: 1000 x 2000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Aluminium EN 1050A (2S)																					
LT 4.00 x 10.00	Z 1.00 x 0.50	68.0%		●																	
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%				●															
Mild steel																					
LT 2.00 x 6.00	Z 0.50 x 0.60	50.0%		●																	
LT 9.00 x 11.00	Z 1.00 x 1.00	72.0%							●												
LT 13.00 x 42.00	Z 2.00 x 1.00	82.0%							●												
LT 16.00 x 20.00	Z 1.50 x 1.50	76.0%										●									
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%				●															
Sendzimir galvanised																					
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%					●														
Stainless steel EN 1.4404 (AISI 316L)																					
LT 3.00 x 6.00	Z 0.70 x 0.50	58.0%		●																	
LT 6.00 x 27.00	Z 2.00 x 1.00	55.0%							●												
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%				●															
Dimension: 1000 x 2500 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 12.00 x 30.00	Z 4.50 x 2.50	41.0%												●							
Dimension: 1000 x 3000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 6.00 x 27.00	Z 2.00 x 1.00	55.0%							●												
LT 13.00 x 42.00	Z 4.50 x 2.50	47.0%												●							
Dimension: 1000 x 3400 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 20.00 x 62.00	Z 6.00 x 3.00	60.0%													●						
LT 20.00 x 62.00	Z 6.00 x 4.00	48.0%														●					
Dimension: 1000 x 8000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Stainless steel EN 1.4404 (AISI 316L)																					
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%				●															
Dimension: 1000 x 10000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%				●															
LT 30.00 x 88.00	Z 3.00 x 3.00	78.0%													●						





# RM Stock list 107















- = 1 day of delivery
- ▲ = 10 days of delivery

Hole type & size (mm)	Pitch type & size (mm)	Open area	Thickness (mm)																		
Dimension: 1220 x 2440 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 34.00 x 122.00	Z 9.50 x 4.50	50.0%															•				
Dimension: 1250 x 1250 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 3.00 x 6.00	Z 0.80 x 0.60	53.0%			•																
Stainless steel EN 1.4301 (AISI 304)																					
LT 2.00 x 5.00	Z 0.60 x 0.50	43.0%		•																	
Dimension: 1250 x 2500 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Aluminium EN 1050A (2S)																					
LT 20.00 x 62.00	Z 2.00 x 2.00	78.0%											•								
LT 30.00 x 88.00	Z 3.00 x 3.00	78.0%													•						
Mild steel																					
LT 3.00 x 18.00	Z 0.80 x 1.00	53.0%			•																
LT 8.00 x 27.00	Z 2.00 x 1.50	55.0%										•									
LT 10.00 x 20.00	Z 1.20 x 1.20	73.0%									•										
LT 13.00 x 42.00	Z 2.00 x 2.00	66.0%											•								
LT 16.00 x 20.00	Z 2.00 x 2.00	68.0%											•								
LT 20.00 x 62.00	Z 2.00 x 2.00	78.0%											•								
LT 20.00 x 62.00	Z 3.00 x 3.00	66.0%													•						
LT 20.00 x 62.00	Z 4.50 x 3.00	63.0%													•						
LT 20.00 x 62.00	Z 6.00 x 3.00	60.0%													•						
LT 20.00 x 62.00	Z 6.00 x 4.00	48.0%														•					
LT 26.00 x 3.00	Z 4.80 x 0.50	72.0%												•							
LT 26.00 x 62.00	Z 6.00 x 5.00	53.0%															•				
LT 30.00 x 88.00	Z 3.00 x 3.00	78.0%													•						
LT 30.00 x 88.00	Z 6.00 x 3.00	75.0%													•						
LT 30.00 x 88.00	Z 6.00 x 4.00	68.0%														•					
LT 40.00 x 115.00	Z 6.00 x 4.00	77.0%														•					
Sendzimir galvanised																					
LT 20.00 x 62.00	Z 2.00 x 2.00	78.0%											•								
Stainless steel EN 1.4404 (AISI 316L)																					
LT 20.00 x 62.00	Z 2.00 x 2.00	78.0%											•								
Dimension: 1250 x 3300 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 12.00 x 30.00	Z 4.50 x 2.50	41.0%												•							
Dimension: 1250 x 3800 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 13.00 x 42.00	Z 4.50 x 2.50	47.0%												•							
Dimension: 1250 x 10000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Sendzimir galvanised																					
LT 16.00 x 38.00	Z 1.90 x 0.70	90.0%					•														
Dimension: 1500 x 4000 mm																					
Expanded metal			0.4	0.5	0.6	0.7	0.75	0.8	1.0	1.2	1.25	1.5	2.0	2.5	3.0	4.0	4.5	5.0	6.0	8.0	10.0
Mild steel																					
LT 12.00 x 30.00	Z 4.50 x 2.50	41.0%												•							


# Patterns 1:1

## Patterns 1:1

Besides the most commonly used patterns with round and square holes we produce a wide variety of patterns. Below we show a small selection of the different types of patterns we have in stock. The pictures are 1:1, with reservation for printing discrepancies. Please note that the graphics do not illustrate whether the holes are placed lengthwise or across the sheet.

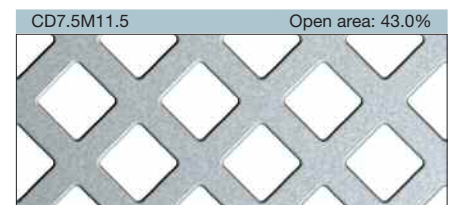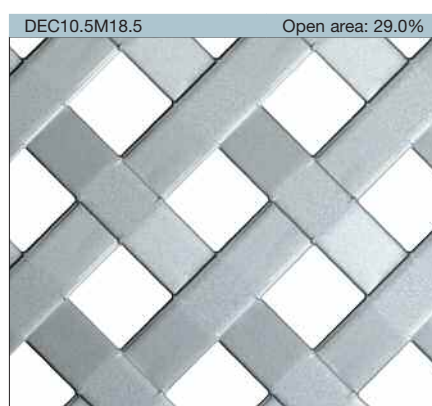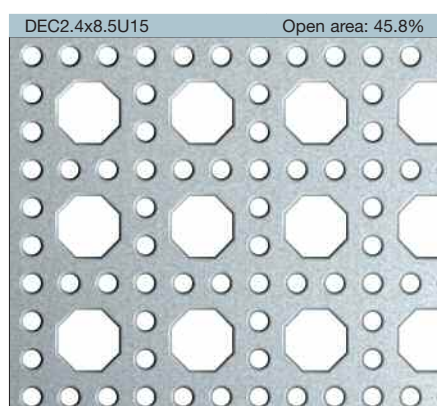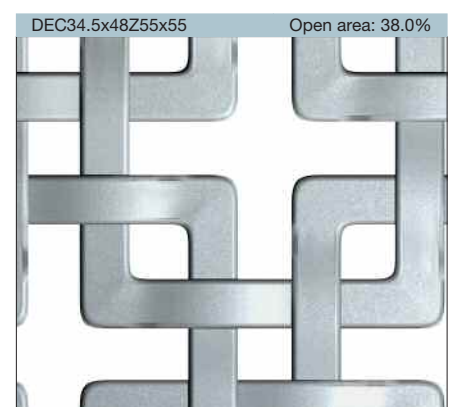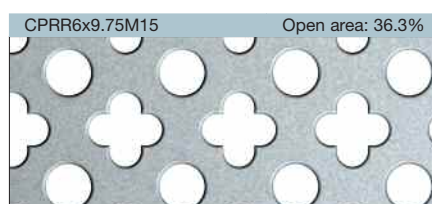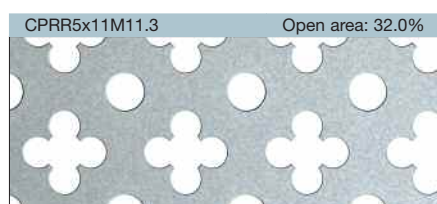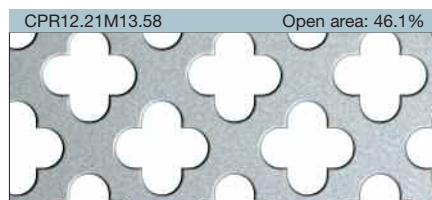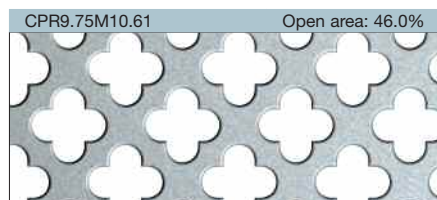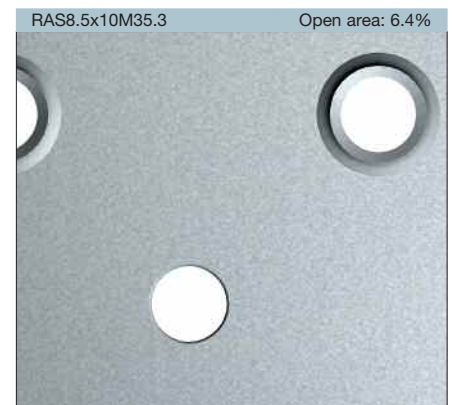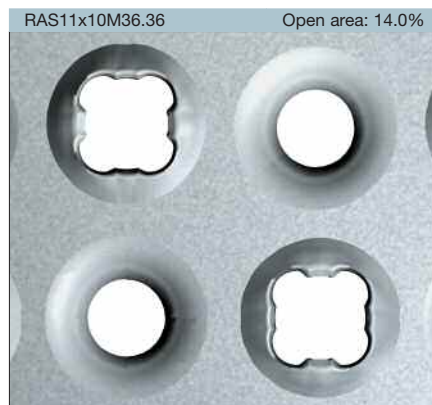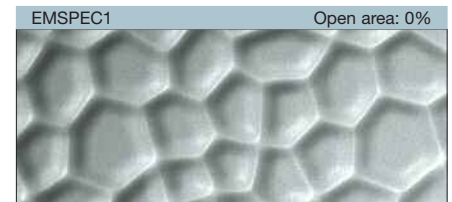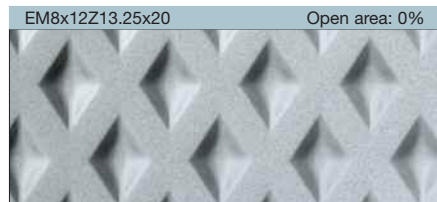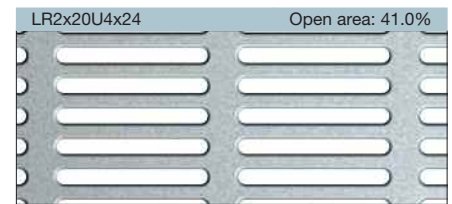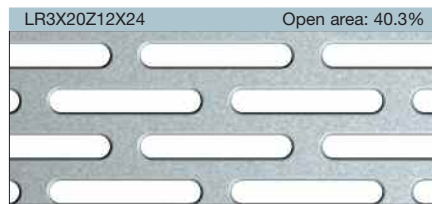


# Description of a perforated sheet

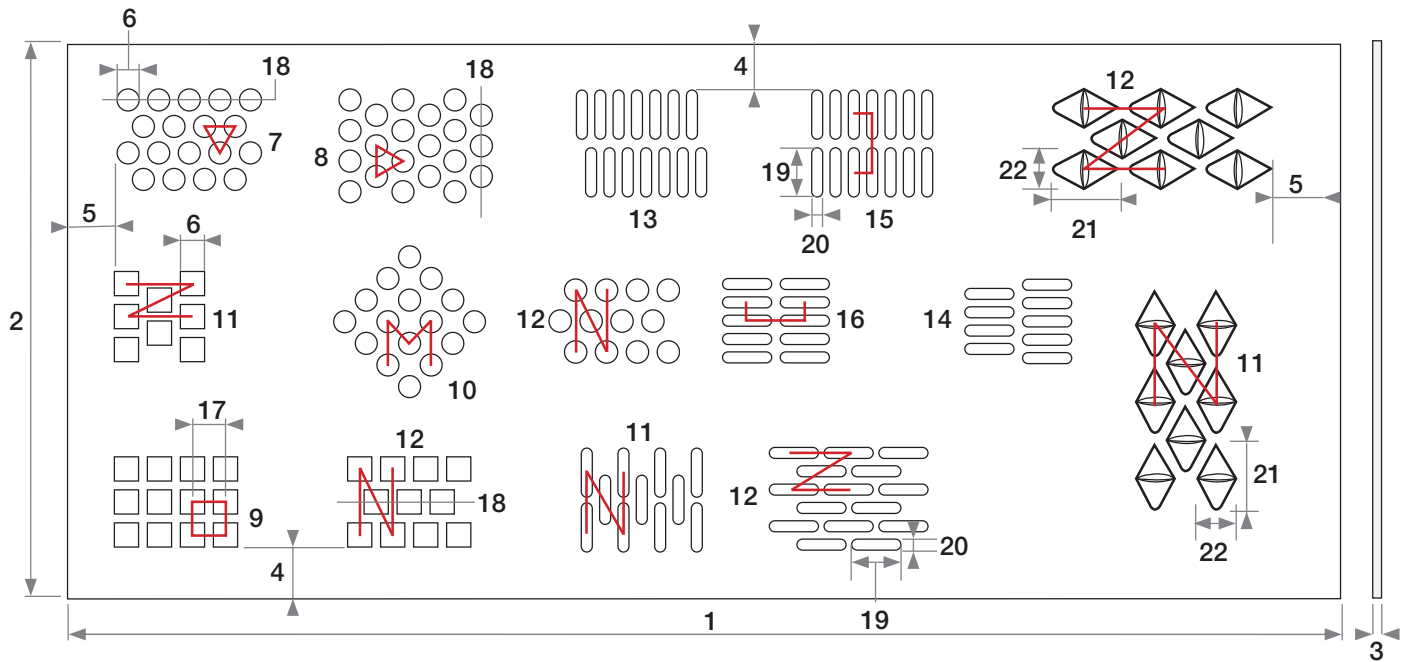


## Hole shape and arrangement

RMIG uses the international ISO norm 7806-1983(E) when describing hole shape and arrangement


### Shape of holes:

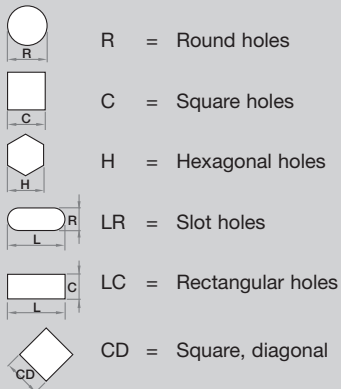

### Arrangement of holes:

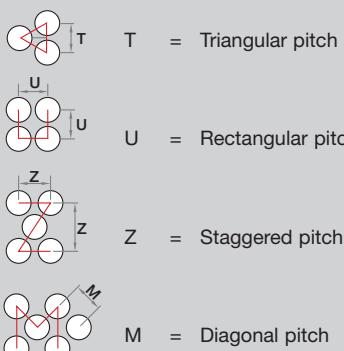

### Examples:

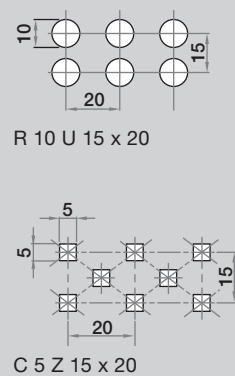


## Guidance

- 1 Length
- 2 Width
- 3 Sheet thickness
- 4 Margins (long sides)
- 5 Margins (short sides)
- 6 Hole size
- 7 Triangular pitch, longitudinal
- 8 Triangular pitch, transverse
- 9 Rectangular pitch
- 10 Diagonal pitch
- 11 Staggered pitch parallel to width
- 12 Staggered pitch parallel to length
- 13 End staggered pit. parallel to width
- 14 End staggered pit. parallel to length
- 15 Rectangular pitch parallel to width
- 16 Rectangular pitch parallel to length
- 17 Measure of pitch
- 18 Row of holes
- 19 Slot hole length
- 20 Slot hole width
- 21 Hole length nose screen
- 22 Hole width nose screen


## Margins

Fig. A




Perforated sheet without margins

Fig. B



Perforated sheet with margins


Fig. C




Perforated sheet with margins

## Toolsettings


1.



2.



3.








# Expanded metal

Expanded metal is a form of net or grating produced by cutting and subsequently expanding the material. The production is done mechanically, the metal being cut with intervals and expanded by a machine.


It is important that you mention length and width of the sheets / coils according to the picture below.

W = Width  
L = Length


- a Width of mesh
- b Length of mesh
- c Width of rib
- d Thickness of rib

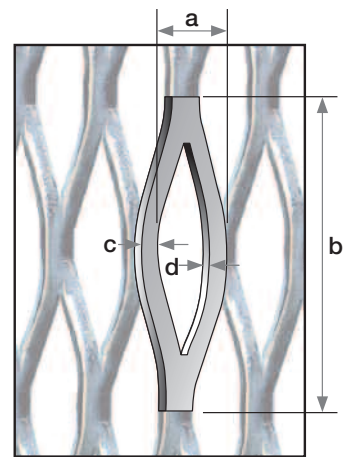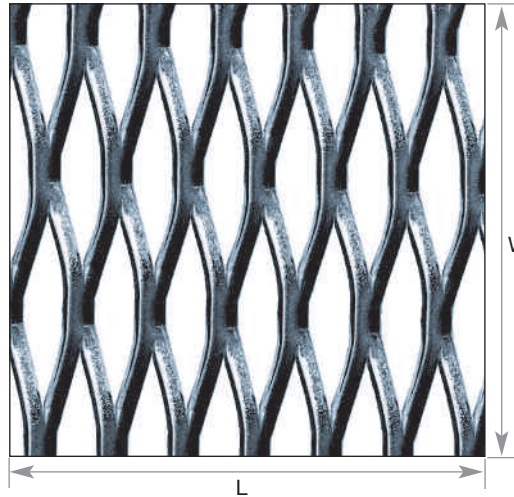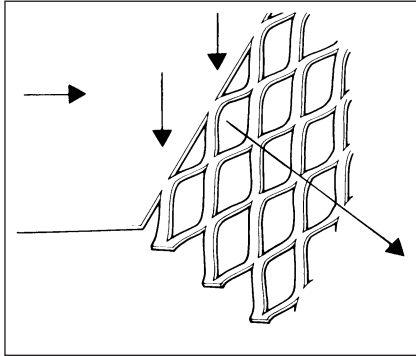

Expanded metal has great strength when exposed to weight, and the raw material is used very efficiently and economically.

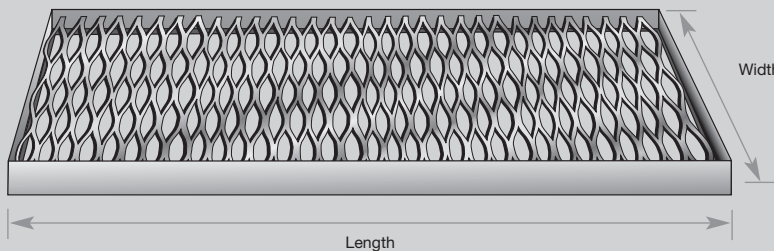

Assembly: Expanded metal has to be fastened so that the short diagonals of the mesh run in the longitudinal direction of the footbridge.

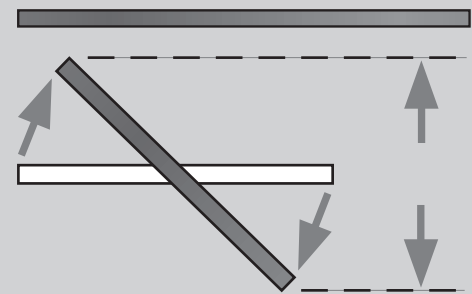

The bending is greatly reduced because of the angular formation of the ribs in proportion to the level of the sheet.



## Load table for walkway gratings - width of footbridge in mm

Type no.	400 mm	500 mm	600 mm	700 mm	800 mm	1000 mm	1250 mm
LT12x30Z4.5x2.5	440	380	310	270	<u>230</u>	190	150
LT13x42Z4.5x2.5	410	350	290	250	<u>220</u>	170	140
LT20x62Z3x3	<u>210</u>	180	150	130	110	90	70
LT20x62Z4.5x3	320	270	<u>220</u>	190	170	130	100
LT20x62Z6x3	430	360	300	<u>260</u>	200	180	140
LT20x62Z6x4	570	480	400	340	300	<u>240</u>	190
LT26x62Z6x5	550	460	390	290	<u>230</u>	180	150
LT30x88Z4.5x3	<u>210</u>	180	150	130	110	90	70
LT30x88Z6x3	280	<u>240</u>	200	170	150	120	90
LT30x88Z6x4	380	320	270	<u>230</u>	200	160	130
LT40x115Z6x3	<u>210</u>	180	150	130	110	90	70
LT40x115Z6x4	280	<u>240</u>	200	170	150	120	90

The load table shows the weight allowable including safety factors in kilos / sq.m mentioned as evenly dispersed (distributed) load. Underlined load corresponds to the weight of a person with tools (around 100 kilos) in the middle of the footbridge.

The load table applies to sheets welded or buckled on the abutment. The abutment and the fastening to it is to be calculated separately.

Please note that we make reservations with regard to any misprints made in this table, or errors made in calculations based on the values in the table.



**RMIG A/S**  
**Industriparken 40 | DK-2750 Ballerup**  
**Tel. +45 44 20 88 00 | Fax +45 44 20 88 01**  
**E-mail: [info.dk@rmig.com](mailto:info.dk@rmig.com) | [www.rmig.com](http://www.rmig.com)**